

551003



**PCT**

[illegible]

**(81) Designated States** (*unless otherwise indicated, for every kind of national protection available*): AE, AG, AL, AM, AT, AU, AZ, BA, BB, BG, BR, BW, BY, BZ, CA, CH, CN, CO, CR, CU, CZ, DE, DK, DM, DZ, EC, EE, EG, ES, FI, GB, GD, GE, GH, GM, HR, HU, ID, IL, IN, IS, JP, KE, KG, KP, KR, KZ, LC, LK, LR, LS, LT, LU, LV, MA, MD, MG, MK, MN, MW, MX, MZ, NA, NI, NO, NZ, OM, PG, PH, PL, PT, RO, RU, SC, SD, SE, SG, SK, SL, SY, TJ, TM, TN, TR, TT, TZ, UA, UG, US, UZ, VC, VN, YU, ZA, ZM, ZW

PCT/AU2004/000388

(25) Filing Language: English

**(26) Publication Language:** English

2003901468	1 April 2003 (01.04.2003)	AU
2003906194	11 November 2003 (11.11.2003)	AU

**(71) Applicant (for all designated States except US): ENTROPIC TECHNOLOGIES PTY LTD [AU/AU]; 28/82 Royal St, East Perth, Perth, Western Australia 6004 (AU).**

**(72) Inventor; and**

(75) **Inventor/Applicant (for US only): ZAHARI, Azman Bin H J [MY/MY]; 10 Lorong 5/10B, Section 5, 46000 Petaling Jaya, Selangor Darul Ehsan (MY).**

(74) Agent: **HOLLIDAY, Neal Joseph**; Lord & Company, 4  
Douro Place, West Perth, Perth, Western Australia 6005  
(AU).


**(84) Designated States** (*unless otherwise indicated, for every kind of regional protection available*): ARIPO (BW, GH, GM, KE, LS, MW, MZ, SD, SL, SZ, TZ, UG, ZM, ZW), Eurasian (AM, AZ, BY, KG, KZ, MD, RU, TJ, TM), European (AT, BE, BG, CH, CY, CZ, DE, DK, EE, ES, FI, FR, GB, GR, HU, IE, IT, LU, MC, NL, PL, PT, RO, SE, SI, SK, TR), OAPI (BF, BJ, CF, CG, CI, CM, GA, GN, GQ, GW, ML, MR, NE, SN, TD, TG).

**Published:**

— *with international search report*

*For two-letter codes and other abbreviations, refer to the "Guidance Notes on Codes and Abbreviations" appearing at the beginning of each regular issue of the PCT Gazette.*

**(54) Title:** A SYSTEM FOR SECURE COMMUNICATION

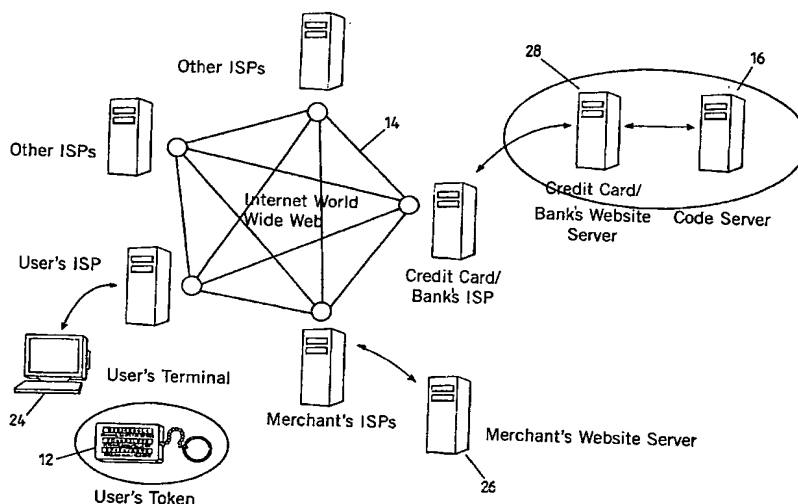

**(57) Abstract:** A system for secure communication across a communication network including a personal code generation means (12) having one or more identification codes (20) and one or more encryption codes (22). The identification codes (20) and the encryption codes (22) each change at predetermined time intervals. A code server (16) is provided and is synchronised with the personal code generation means (12) such that the code server (16) has information regarding the current identification codes (20) and the current encryption codes (22) of the personal code generation means (12). A user transmits across the communication network, the current identification codes (20) and data encrypted with the current encryption codes (22) and the code server (16) uses the information regarding the current identification codes (20) to authenticate the user and the information about the current encryption codes (22) to decrypt the transmitted data.

**WO 2004/088917 A1**